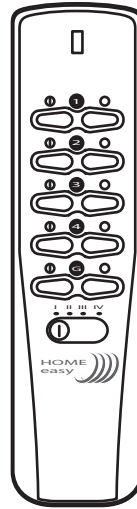
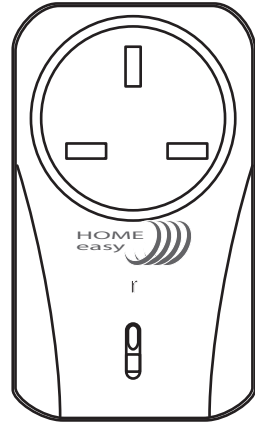


HOME
easy

HE-310 Remote Control & Socket

V1.0

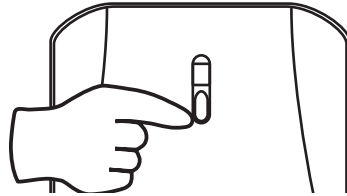
The HE-310 remote control and 3000W socket receiver.



Pairing/Deleting with Remote Control:

Up to Six remote control units can be paired with each receiver socket or module.

To program a socket insert the unit into a plug socket and switch on the power, now press a the "Learn" button.



The LED will start to flash, now press the selected "ON" button on the remote control, the LED will stop flashing. The units are now paired together, you can test this by pressing the selected "ON/OFF" button.

Deleting Remote Control:

To delete a remote control that has been paired with a HE202 receiver socket, simply press the "Learn". The LED will start to blink; press the off button on the remote control, the LED will blink twice to confirm that the remote control has been removed from the receiver sockets memory.


Remote Socket reset:

To delete all the remote control units from the memory of the receiver socket, hold the "Learn" button for more than 6 seconds, the LED will start to blink continuously. Press the learn button again, the LED will blink twice to confirm the deletion of all remote controls from the receiver memory.

Group Settings:

The HE-300 remote control transmitter can be paired with up to 16 separate receiver units, using the Group setting function.

- Group 1 - Function 1, 2, 3, 4 (Default Setting)
- Group 2 - Function 5, 6, 7, 8
- Group 3 - Function 9, 10, 11, 12
- Group 4 - Function 13, 14, 15, 16



The HE-300 also has a group button allowing you to switch "On/Off" an entire group, at the push of a button.

Group Setting G:

The group setting allows you to switch "On/Off" multiple receiver sockets/modules in one simple press. To set a receiver to the group setting, set the receiver into the learn mode as normal (see instructions Learn Mode) and press group(G) On.



The socket will now switch On/Off with the group buttons; this stays the same even if the group slide switch is on I, II, III or IV. The receiver sockets/modules can still be used individually using the normal On/Off buttons.

Changing Battery:

The HE-300 uses a single CR2032 battery:

Simply move the battery holder from the bottom of the remote control.

Remove the battery from the holder and replace with new, making sure the polarity matches the internal markings.

Product Specification:

Remote Control: HE-300

Battery: 3v Cr2032

Range: 30 Metres (Open Distance)

Frequency: 433.92MHz

Indoor Use Only

Remote Socket: HE-302

Max Load: 3000W (Max)

Range: 30 Metres (Open Distance)

Indoor Use Only

Warning: Never Exceed the Product Specification

Contact:

C H Byron
34, Sherwood Rd
Aston Fields
Bromsgrove
B60 3DR

Helpline: 0845 2301 231

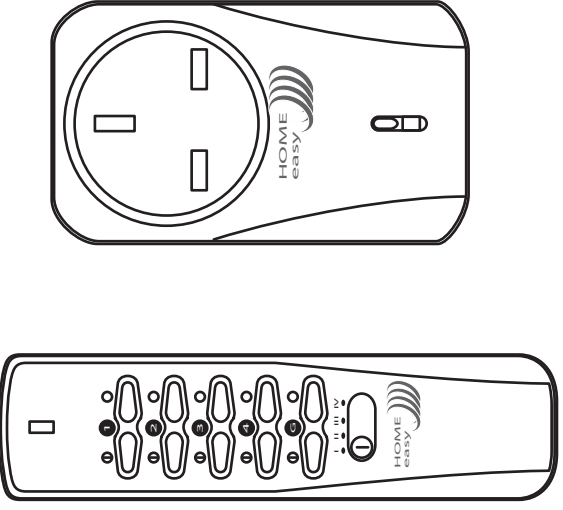
Tel: 0845 2301231
Fax: 01527 557701
Web: www.chbyron.com
E-mail: support@chbyron.com










Byron		433MHz	
R&TTE APPROVED		CE 0560	
A	IRL	UK	M
B	I	BG	N
DK	L	CZ	SK
FIN	NL	EST	SLO
F	P	H	CH
D	E	IS	PL
GR	S	LV	RO
LT			

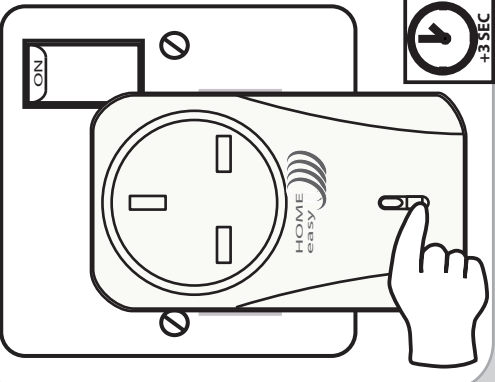
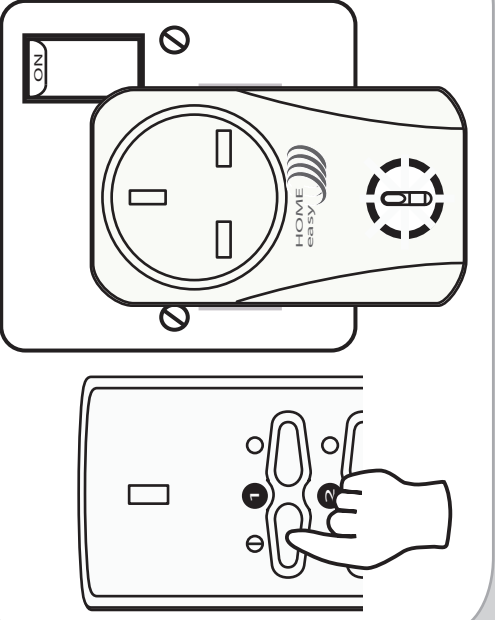
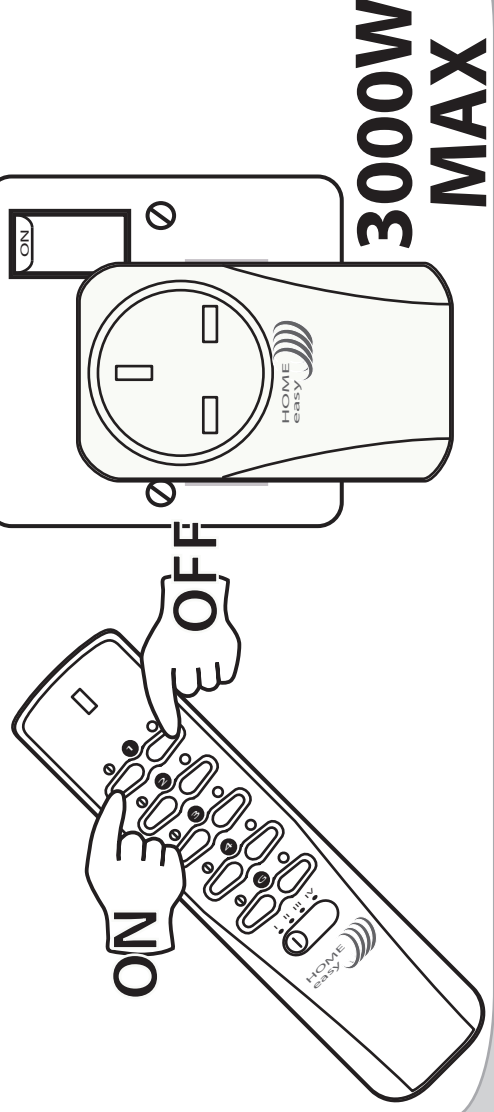
CH Byron Electrical United Kingdom. www.chbyron.com

HOME easy

Quick Guide



 Individual	 Group	 CR 2032
 ON OFF	 Indoor use only	
 3000W MAX	 +40 C -10°C	 30m

**3000W
MAX**